

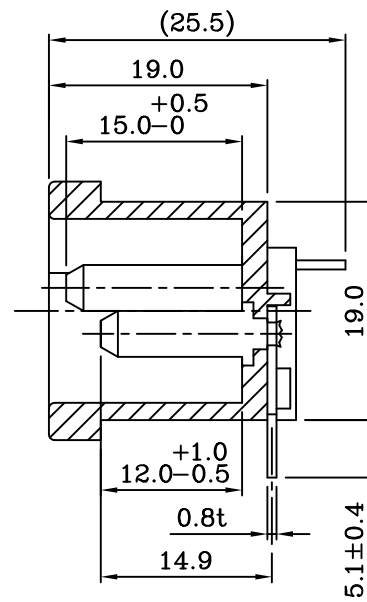



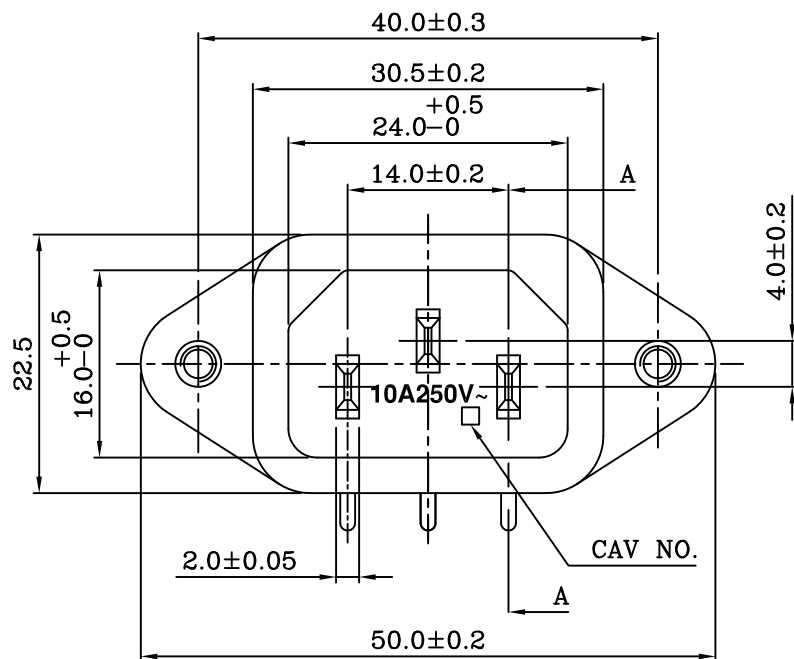


A-A

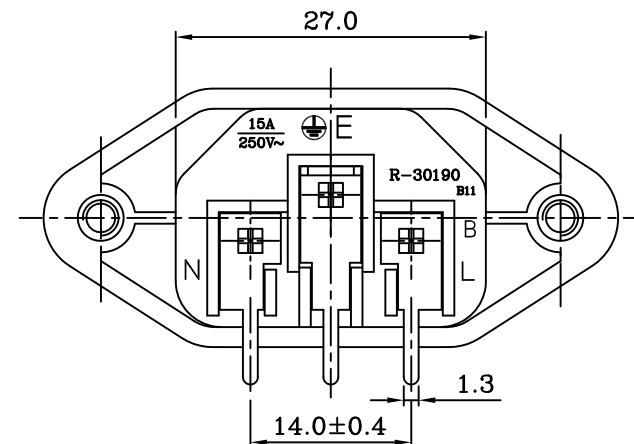

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

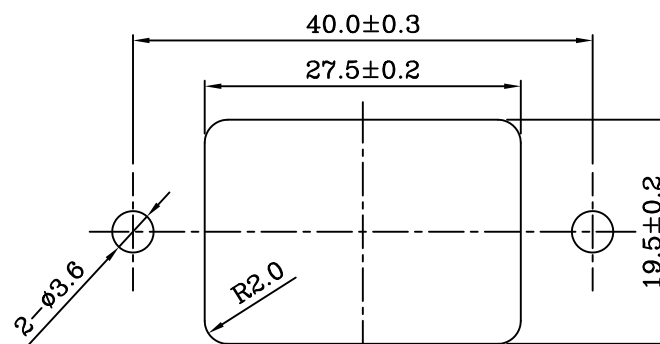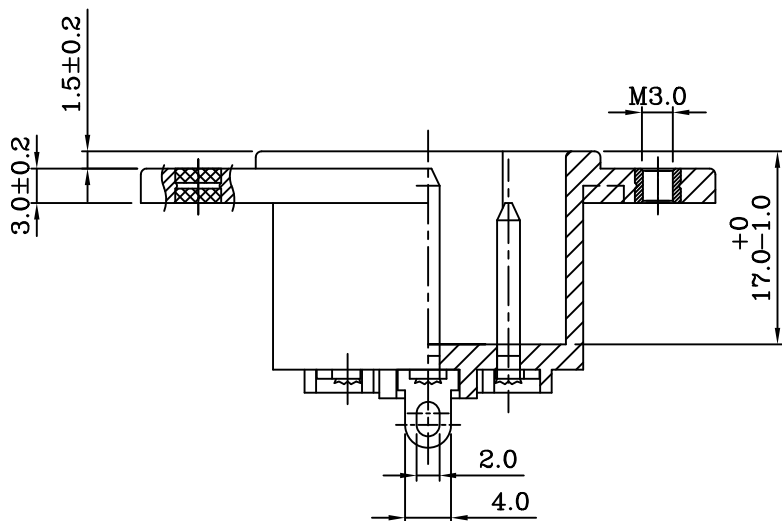


PANEL CUT-OUT

Rating:AC 15A 250V	
Mark	Safety Regulation
cA _{US}	CULUS
Rating:AC 10A 250V	
Mark	Safety Regulation
VDE	VDE
CCC	CCC
ENEC	ENEC

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552新北市中和區中正路799號1樓
1F.No.799,Chung Cheng Road,Chung Ho Dist,New Taipei City,Taiwan 23552 R.O.C.
TEL:886-2-2226-8001 FAX:886-2-2226-8002
<http://www.sweeta.com.tw> sweeta.tw@msa.hinet.net



DRAWN BY

李
2010.6.23
小英

UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

SWR-30190(B39)

REV

ID NO

10062213Q

INTERIM NO.

R-30190(B39)

C

DESCRIPTION

NEW NO.