

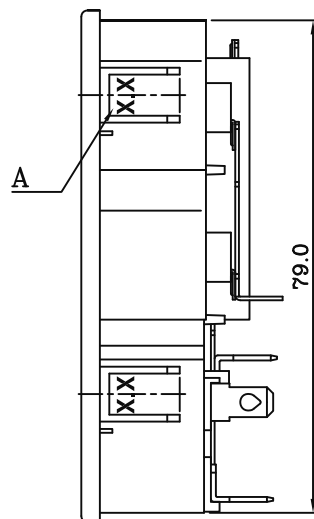


PANEL CUT-OUT

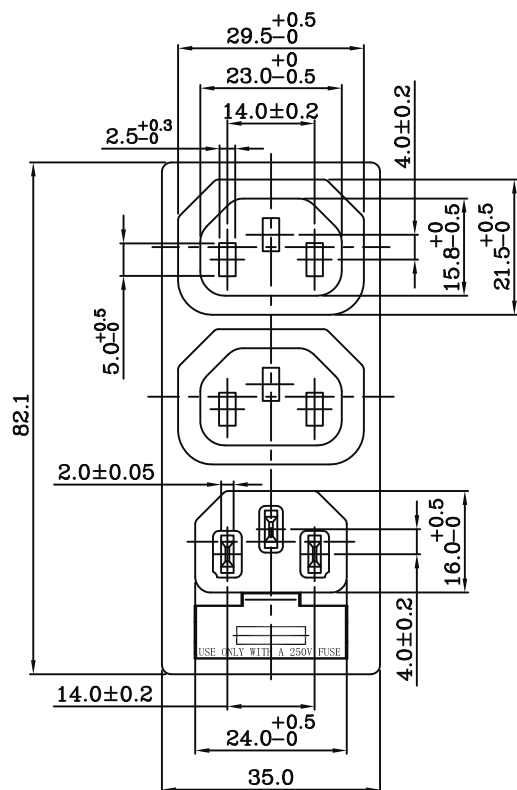

XX	A
10	1.0
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5

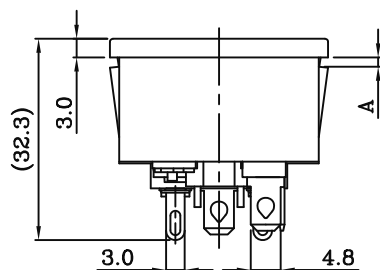

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.


Rating:AC 10A 250V	
Mark	Safety Regulation
	CCC
	VDE
	ENEC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net



DRAWN BY



UNIT

mm

UNIT Q'TY

1

SCALE

4:5

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

SWR-3014G22 (07) XX

REV

ID NO

100331A18

INTERIM NO.

DESCRIPTION

NEW NO.

B

APPROVED BY

