

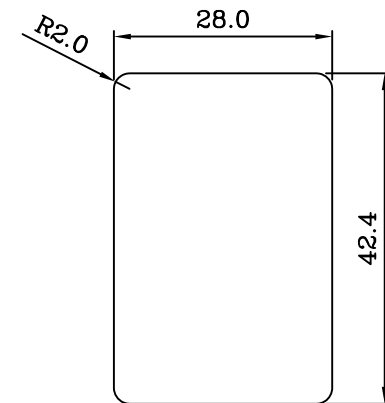
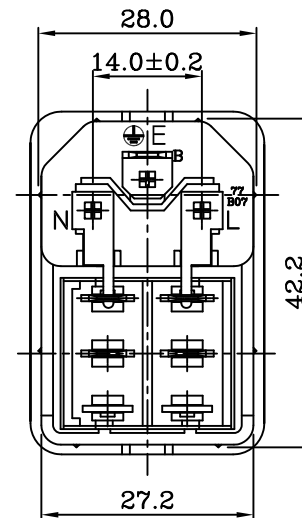
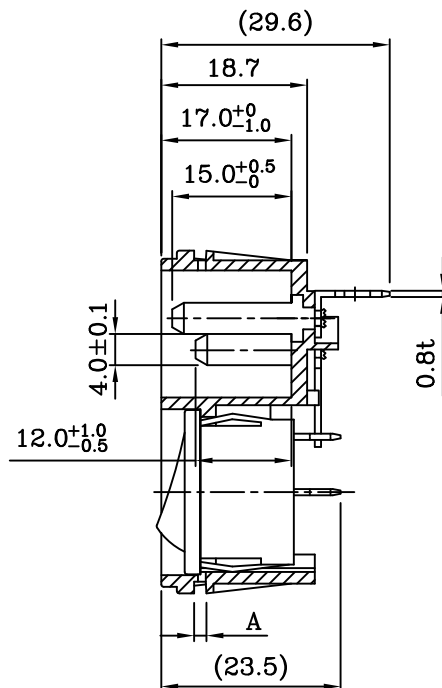


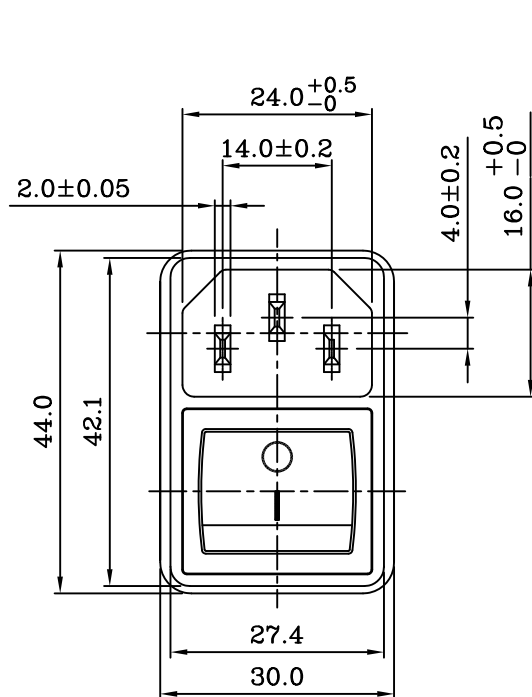

PANEL CUT-OUT

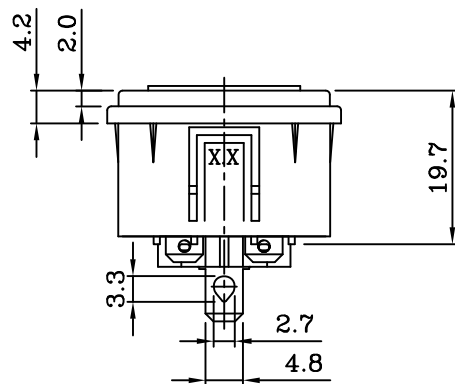

XX	A
1.5	1.6
1.7	1.8
2.0	2.1
2.5	2.6

SPECIFICATION (SWITCH) :

- 1.CIRCUIT : DPST ON-OFF.
- 2.CONTACT RESISTANCE : 30MΩ Max.
- 3.INSULATION RESISTANCE : DC 500V 100MΩ Min.
- 4.WITHSTAND VOLTAGE : AC 1000V 1 Minute.
- 5.OPERATION FORCE : 800±300g.
- 6.ELECTRICAL LIFE : 10,000 Cycles At Full Load.
- 7.OPERATING TEMPERATURE RANGE : -25°C ~ +85°C.
- 8.SOLDERING : 280°C FOR 3 Sec.
- 9.DIELECTRIC STRENGTH: 2000V AC 1 Minute.
- 10.BODY MATERIAL : Black Glass-Fiber

Thermoplastic. UL 94V-2~0.

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber
Thermoplastic . UL 94V-2~0

Rating:AC 10A 250V	
Mark	Safety Regulation
	CCC
	VDE
	ENEC
Rating:AC 15A 250V	
Mark	Safety Regulation
	cULus


DRAWING:C:DG\NEW-R\T\301SN\R-301SN(77)XX.DWG

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION


23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net




DRAWN BY



UNIT Q'TY
1

APPROVED BY



TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO
120203A01

DESCRIPTION

PRODUCT NO. SWR-301SN(77)XX
INTERIM NO.
NEW NO.

REV
B