


类 型		防水开关		品 名		SSW5-04N-45-C5		RoHS	
1. 功能规格									
1.1 额定电压		250VAC			1.4 操作力(OF)		45±20gf		
1.2 额定电流		5A			1.5 自由位置(FP)		17.5±1.0mm		
1.3 接触电阻(CR)		≤50mΩ(初始值)			1.6 动作位置(OP)		14.2±1.2mm		
2. 可靠度参数									
2.1 机械寿命		100,000 cycles			2.5 焊接工艺		手工焊		
2.2 电气寿命		10,000 cycles			2.6 适用温度		-25℃ - +80℃		
2.3 绝缘电阻		≥100MΩ DC500V(初始值)			2.7 适用湿度		<85%RH		
2.4 耐压强度		AC1000V 1 minute(初始值)			2.8				
3 防护等级		测试条件及技术要求				结论判定			
3.1 防尘 ≤Φ1.0mm (IP5X)		试验样品以正常使用位置在防尘箱中安装,按GB4208-1993中第二种类型外壳(开关内腔压力与周围大气压力相同)进行试验;试验应持续8h,期间应将开关通以1h最大额定电流和断电1h;试验后,在周围空气温度为(25±10℃)的条件下,将开关通以额定电流5A 250VAC进行温升测试				试验后,开关应满足: 1. 动作正常; 2. 温升测试≤50K; 3. 端子之间及端子与外壳外表面耐电压强度≥1000V			
3.2 防止垂直方向滴水(IPX1)		将在环境温度为(70±2℃)的加热箱内进行240h老化试验后的样品立即取出,在(25±10℃)的温度中放置至少16h后进行防水测试;试验所使用的清水与试验时试样温差不大于5K(试验期间不通电)。				试验后,开关应满足:密封胶帽及开关本体不得出现变形、破损、硬化等老化现象;开关塑胶件上应没有致使爬电距离和电气间隙减小到标准值以下的水迹;端子之间及端子与外壳外表面耐电压强度≥1000V			
3.3 参考标准及条件		GB4208-1993/IEC60529-1989《外壳防护等级》 GB15092.1-2003/IEC61058-1:1996《器具开关 第一部分:通用要求》 环境条件:温度范围15℃-35℃;相对湿度25 %-75%。							
4 尺寸规格图									
SCHEMATIC COM NO NC									
版 本		修订内容					日期		修订人
文件编号					第C版 第0次修订		一般公差		±0.2
文件名称		成品规格书					单 位		mm
拟制	邓秋云	审核	秦黎明		批准	吴万涛		生效日期	20091013

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

SERIES 系列		MICRO SWITCHES (Water Proof Type)(SSW5)		Issuance date 日期:		20060801	
Document No.文件编号		DIC/PE024-014		Edition 版本	C	Page 页码	1/4
NO.	Part Name 品名	Q'TY 数量	Generic Class 材质		SGS No. SGS 报告编号		
1	Terminal 端 子	3	C2680		见 SGS 报告		
2	Base 底 座	1	Nylon		见 SGS 报告		
			PLASBLACK		见 SGS 报告		
3	Change Plate 切换片	1	C5210		见 SGS 报告		
4	Contact 触 头	3	Ag 银		见 SGS 报告		
5	Spring 弹 簧	1	SUS304		见 SGS 报告		
6	Cap 胶帽	1	RUBBER		见 SGS 报告		
7	Button 按 钮	1	PBT		见 SGS 报告		
			PLASBLACK		见 SGS 报告		
8	Lever 压 柄	1	SUS301		见 SGS 报告		
9	Upper Housing 上 盖	1	Nylon		见 SGS 报告		
			PLASBLACK		见 SGS 报告		

Structure chart:
结构示意图:

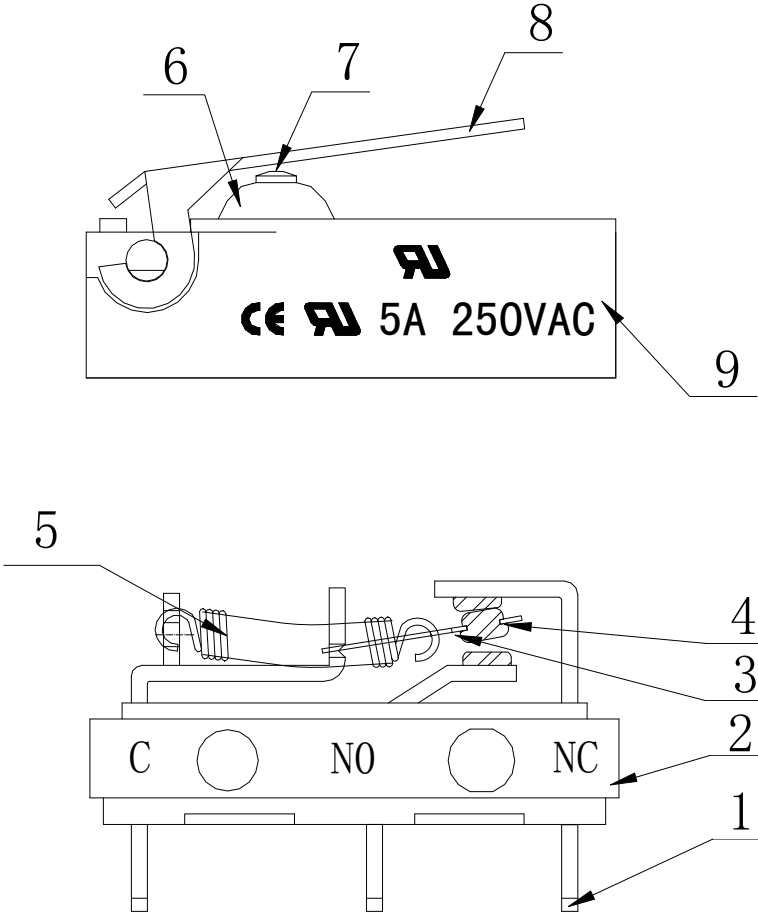

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

SERIES 系列		MICRO SWITCHES (Water Proof Type)(SSW5)		Issuance date 日期:		20060801	
Document No.文件编号		DIC/PE024-014		Edition 版本		C	Page 页码 2/4
1、General(一般特性)：							
1.1 Switch rating:		5A 250VAC（规格：5A 250VAC）					
1.2 Operating temperature range		-15℃~70℃（操作温度范围: -15℃~70℃）					
1.3 Preservative temperature range		-25℃~80℃(储存温度: -25℃~80℃)					
1.4 Storage humidity range		<85%RH（储存湿度: <85%RH）					
2.Performance 功能参数							
2.1 Electrical characteristics(电气特性)							
Items 项目		Test conditions 测试条件				Criteria 标准	
2.1.1	Contact resistance 接触电阻	Applying a static load twice the operating force to the button, measurements shall be made between the terminals. Measurement shall be made with a stablization contact resistance meter for 2 mΩ precision under the condition which a voltage of DC5V and a current of 0.1A shall be applied between the terminals. 在按钮上施加两倍操作力的静负荷值，采用精度为 2 mΩ 高稳定度线性毫欧表，在 DC5V，0.1A 的条件下测量端子两端接触电阻。				Refer to individual product drawing 参考规格图纸	
2.1.2	Insulation resistance 绝缘电阻	Spec. voltage (Refer to 2.3 item of spec. drawing) is applied between each pair of terminals and between the terminal and the metal frame for one minute. Measurement shall be made with a test instrument of insulation resistance under the condition which a voltage of spec.voltage is applied between the terminals. 采用绝缘电阻测试仪，分别在相互绝缘的所有端子之间及各接线端子与外露的非金属零件之间加载规格电压（参见规格图 2.3 项），持续 1 分钟测试绝缘电阻。				Refer to individual product drawing 参考规格图纸	
2.1.3	Dielectric withstand in voltage 耐压强度	Spec. voltage (Refer to 2.4 item of individual product drawing) shall be applied across terminals and frame for one minute. 在端子两端之间加载规格电压（参见规格图 2.4 项）,持续时间为 1 分钟.				There shall be no breakdown 无电击穿等异常.	

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

SERIES 系列		MICRO SWITCHES (Water Proof Type)(SSW5)		Issuance date 日期:		20060801		
Document No.文件编号		DIC/PE024-014		Edition 版本		C	Page 页码	3/4
Items 项目		Test conditions 测试条件						Criteria 标准
3.Mechanical characteristics 机械特性								
3.1	Free Position 自由位置	Position of switch plunger or actuation when on external force is applied. 开关不受外力时之位置。						Refer to individual product drawing 参考规格图纸
3.2	Operating Position 动作位置	Position of switch plunge or actuator at which point contacts snap from normal to operated position. Note that the case of flexible of adjustable actuators. 开关操动件受到外力后，由自由状态切换到动作状态的动作位置。 (注意防止盖片变形或按钮倾斜现象。)						Refer to individual product drawing 参考规格图纸
3.3	Operating Force 操作力	Placing the switch such that the direction of switch operation is vertical, and then gradually increasing the load applied to the button, the maximum load for the button to come to operating position shall be measured. 置开关于垂直状态，渐增力度使按钮至动作位置为最大值之力度。						Refer to individual product drawing 参考规格图纸
3.4	Terminal Strength 端子强度	Placing the switch such that the direction of switch operation is vertical, a static load of 1kgf Max shall be applied to the tip of the terminal in the direction of operation for one minute. 置开关于垂直状态，动作端子顶端接线端强度 1kgf Max，时间为 1 分钟。						There shall be no sign of damage mechanically and electrically. 机械性能、电气性能无损害现象。
3.5	Button Strength 按钮强度	Placing the switch such that the direction of switch operation is vertical, a static load of 1kgf Max shall be applied to the center of the button in the direction of button operation for one minute. 置开关于垂直状态，在端子接线端顶端施加 1kgf Max 力，时间为 1 分钟。						
4. soldering characteristics 焊接性能								
4.1	Hand soldering 手工焊	Use a soldering iron of 30 watts, controlled at 350~360℃ approximately 3 seconds 1 time while applying solder. 焊接时需在 30 瓦烙铁，控制于 350~360℃，大约 3 秒钟一次的条件下进行。						(1)A new uniform coating of solder shall cover a minimum of 90% of the surface being immersed. (2)There shall be no defects in appearance or in the mechanical functions. (1)覆锡性能达到浸入表面的 90%以上 (2)没有出现任何外观和机械功能上的损伤。

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

SERIES 系列		MICRO SWITCHES (Water Proof Type)(SSW5)		Issuance date 日期:		20060801	
Document No.文件编号		DIC/PE024-014		Edition 版本		C	
Page 页码		4/4		Items 项目		Test conditions 测试条件	
Criteria 标准		5. Durability characteristic:耐久性能					
5.1	Mechanical life 机械寿命	(1) Without loading 无负载 (2) Operating speed : 120 cycles/minute 操作频率: 120 次/分钟 (3) Push force : maximum value of operating force twice 推动力: 操作力的最大规格值的两倍 (4) Life: 100,000 cycles 寿命: 100,000 次				After test: (1)Contact resistance:1 ohm Max. (2)Insulation resistance: 10M ohm Min. (3)Bounce: 5m sec. Max. (4)Withstand voltage: AC1000V, 1 minute (5)Operating force: 30% of initial value (6) There shall be no defects in appearance or in the mechanical functions.	
5.2	Electrical life 电气寿命	(1) which the load of 5A 250VAC 负载为 5A 250VAC (2) Operating speed : 10 cycles/minute 操作频率: 10 次/分钟 (3) Push force : maximum value of operating force twice 推动力: 操作力的最大规格值的两倍 (4) Life: 10,000 cycles 寿命: 10,000 次				试验后: (1) 接触电阻:1 欧姆以下 (2) 绝缘电阻:10 兆欧姆以上 (3) 灵敏度: 5 毫秒以下 (4) 耐压强度: AC1000V, 1 分钟。 (5) 操作力度:测试初始值的 30% 以内 (6) 没有出现任何外观和机械功能上的损伤。	
6. Special Requirements 特别要求							
6.1 Hazardous Substance Management: Follow environmental requirements: Hazardous Substance,DIC/WI/G506. 危害物质管理: 遵环境物质规范: 危害物质DIC/WI/G506。							
7. Marks explanation 标志说明							
7.1 There should be Model No. marks. 每个产品上应有标识字样。 7.2 “NC, NO and C” discriminating signs of terminals should be carved on the upper housing and be clear. 开关引出端子“NC、NO、C”识别标记应刻在塑胶上盖上, 清晰可识别。							
7.3 There should be “5A 250VAC” rating and certification marks on upper housing.(Refer to individual product drawing) 开关上盖上应有电气额定值: “5A 250VAC ” 及安规认证标志。(参考规格图纸)							
8. Packing explaintion 包装说明							
8.1 Having different transport and exist differ package :1.Mainland: 90pcs for one case, 78 cases for one box; 2.HK:90pcs for case,78 cases for one box; 3.Taiwan: 90pcs for one case, 76 cases for one box; 运输方式不同, 包装方式也不一致: 1、大陆: 每盒包装90pcs,每箱装78 盒; 2、香港: 每盒包装90pcs,每箱装78 盒; 3、台湾: 每盒包装90pcs,每箱装76 盒。							
9.Quanlity records of delivered goods 出货证明记录							
9.1 Package boxes or package bags should be attached labels or identifiers of Model No., Quantity and Quality Pursuing No. 成品包装箱或包装袋上应附有产品型号、数量及质量追踪号的标签或标识。 9.2 There shall be quality records of inspection and test in package boxed. 出货产品包装批、出货批应附有产品检验、试验之质量证明记录。							