


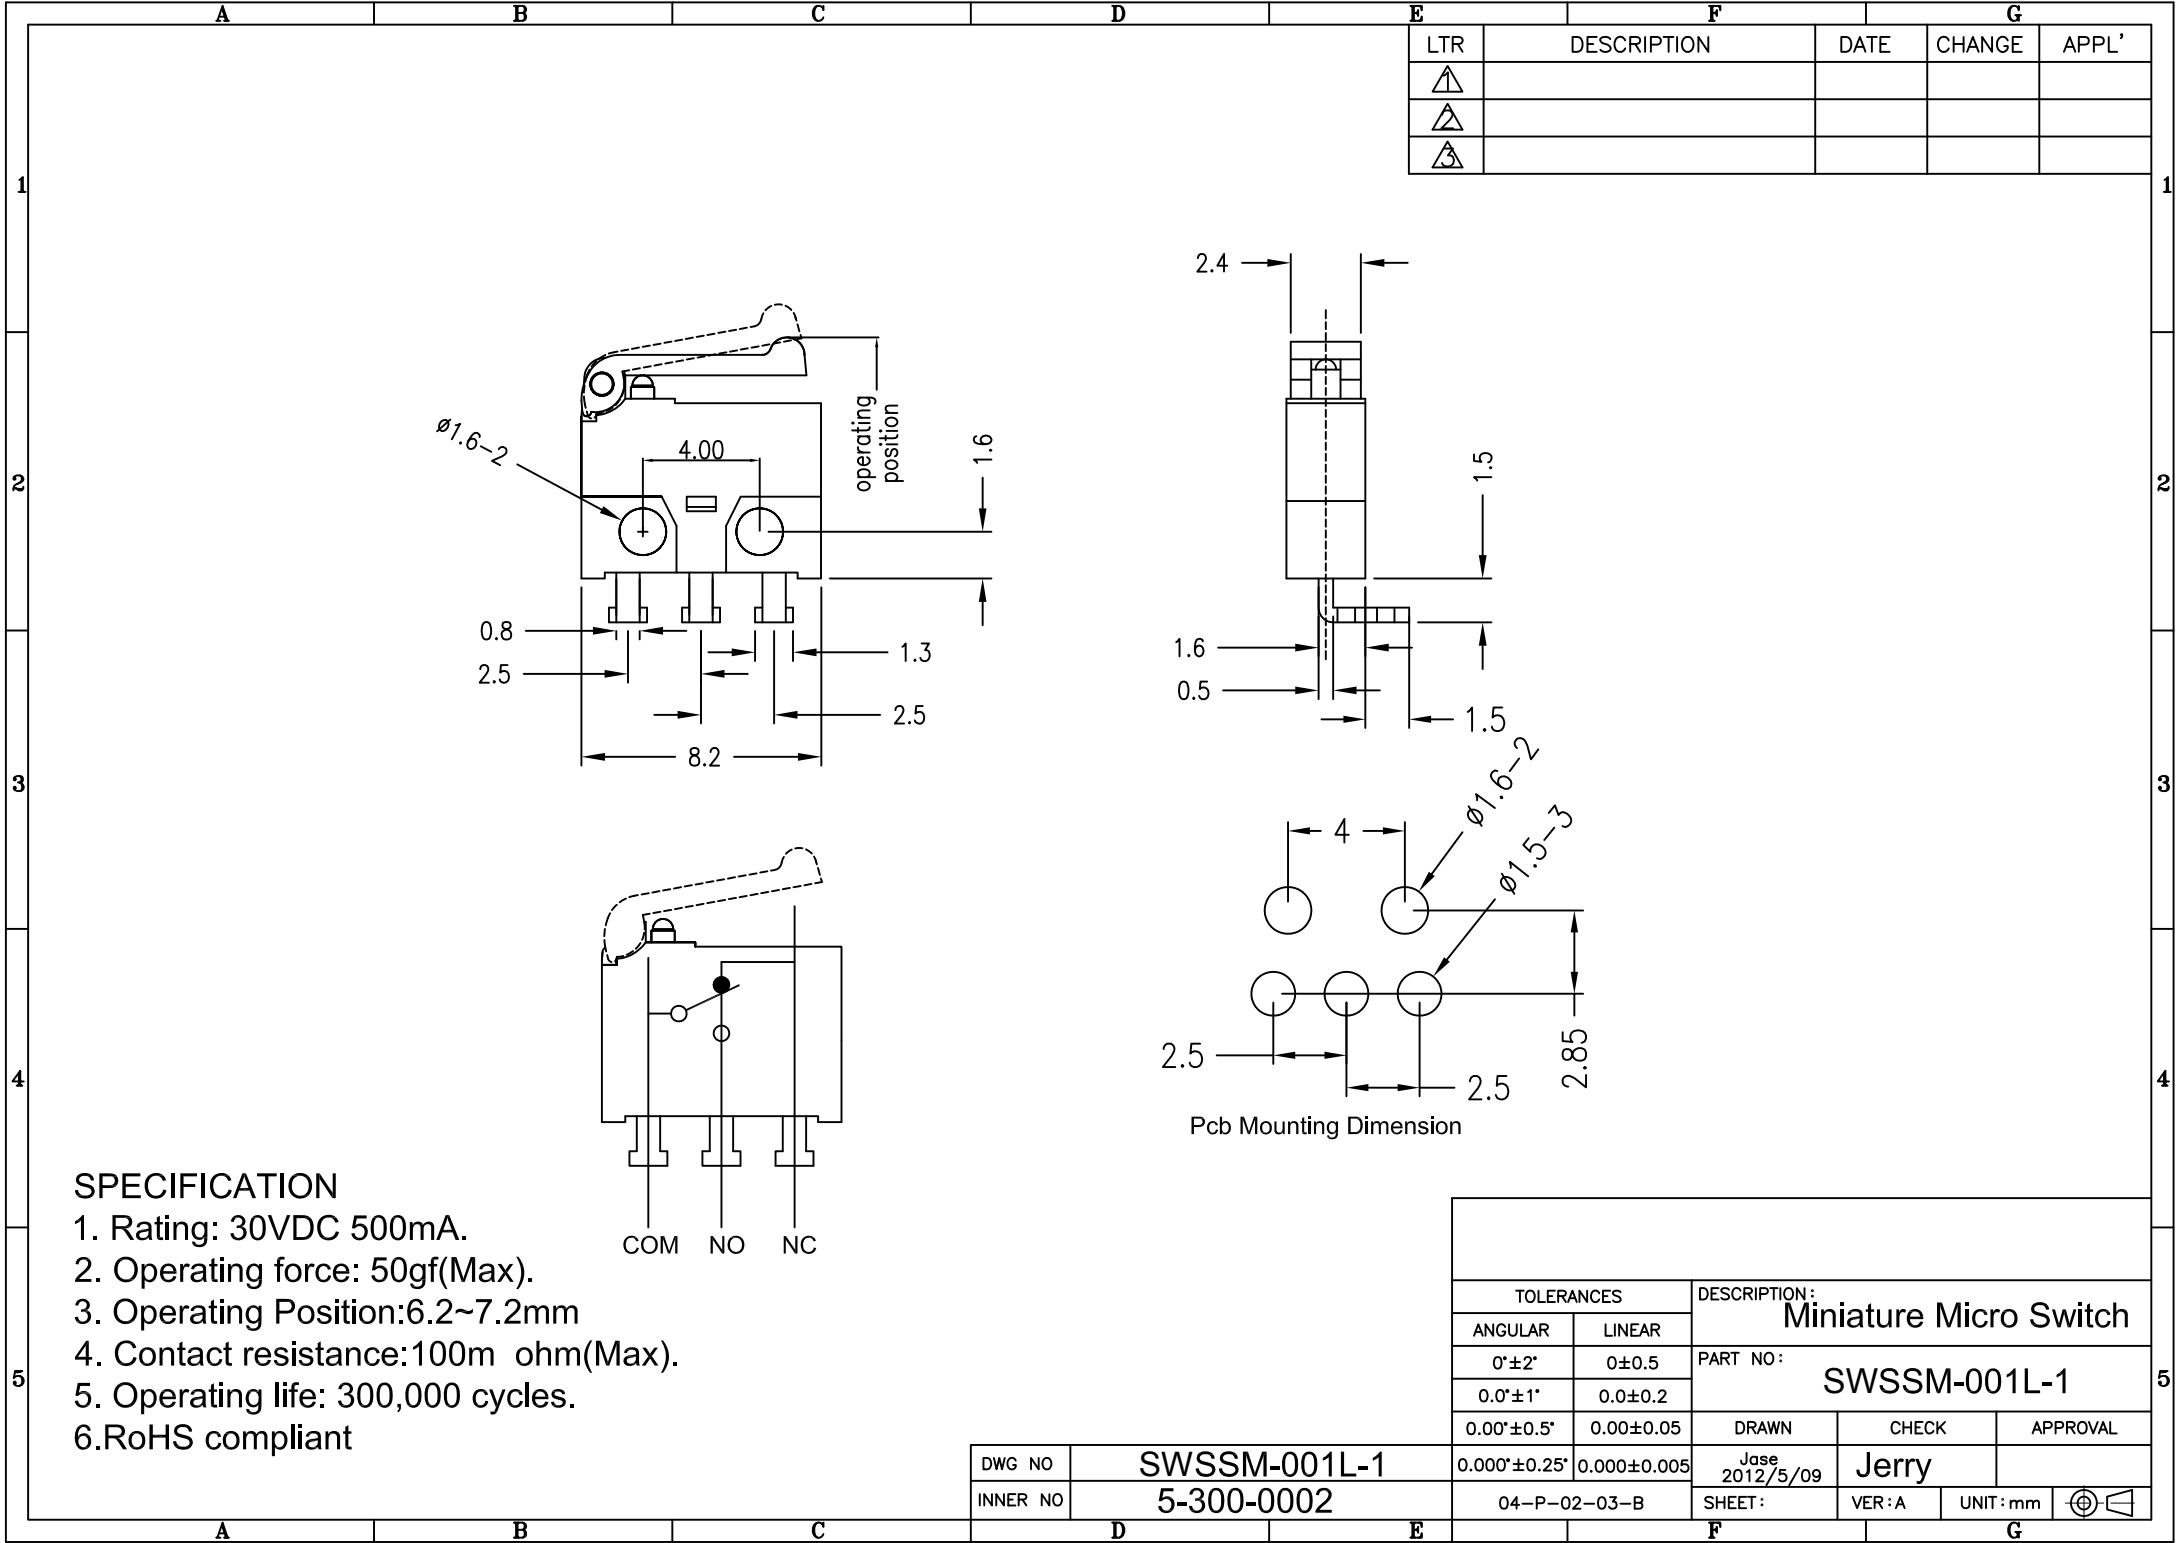

SPECIFICATION

1. Rating: 30VDC 500mA.
2. Operating force: 50gf(Max).
3. Operating Position:6.2~7.2mm
4. Contact resistance:100m ohm(Max).
5. Operating life: 300,000 cycles.
- 6.RoHS compliant

COM NO NC

DWG NO	SWSSM-001L-1		0.000'±0.25'		0.000±0.005	Jase 2012/5/09		Jerry		
INNER NO	5-300-0002		04-P-02-03-B			SHEET:		VER:A	UNIT:mm	