




Rating	10A 125V AC ,6A 250V AC  US	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Switch Function	2P SPST OFF-ON		





Material :

Housing : Nylon#66,Black

Button : Nylon#66,Red

Terminals : Silver plated brass

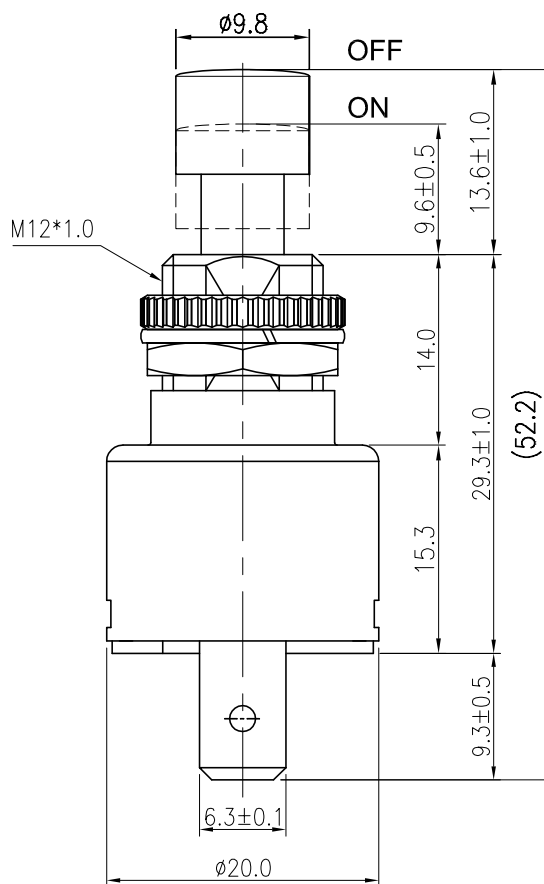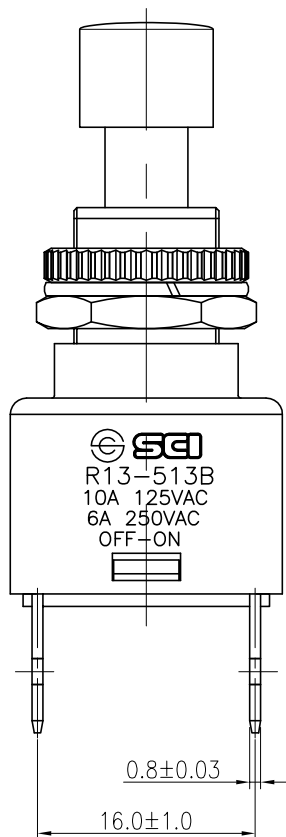

Tolerances Unless Otherwise Specified ± 0.3

08/04/'12	柳新強	增加SCI LOGO					
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.	1830656	Model Name	PUSH SWITCH	
柳新強	徐洲迎	楊金江	Customer No.		Model No.	SPR13-513B2-01	Rev.
08/04/'12	08/04/'12	08/06/'12	Unit	mm	SWEETA PRODUCTS CORPORATION		1