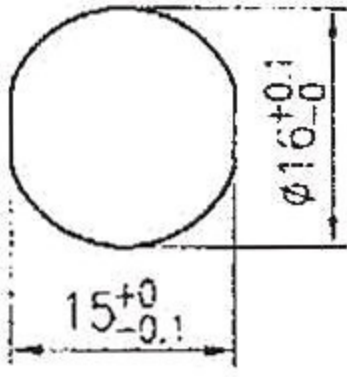




Rating	3A 125V AC 1.5A 250V AC		Mounting Hole	Circuit Diagram	
Contact Resistance	50m ohm Max			OFF	
Insulation Resistance	DC 500V 100M ohm Min.			(ON)	
Dielectric Strength	AC 1500V 1 minute.				
Operation Temperature	-20°C~85°C				
Switch Function	4P SPST OFF-(ON) (LED)				

LED Rating

Red:@20mA,If=2.0VDC

Yellow:@20mA,If=2.1VDC





Green@20mA,If=2.2VDC

Material:

Frame: Nylon#66, Black

Actuator: PC

Terminals:Copper Alloy

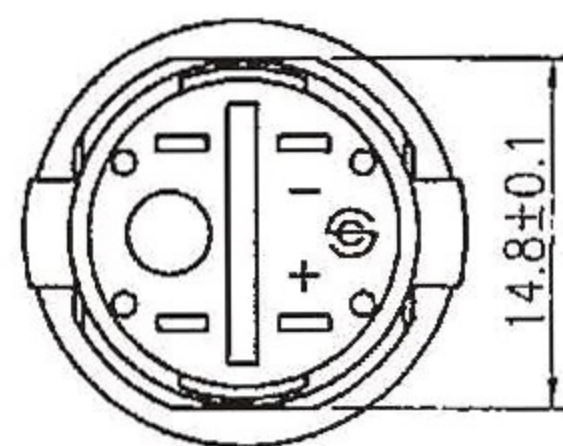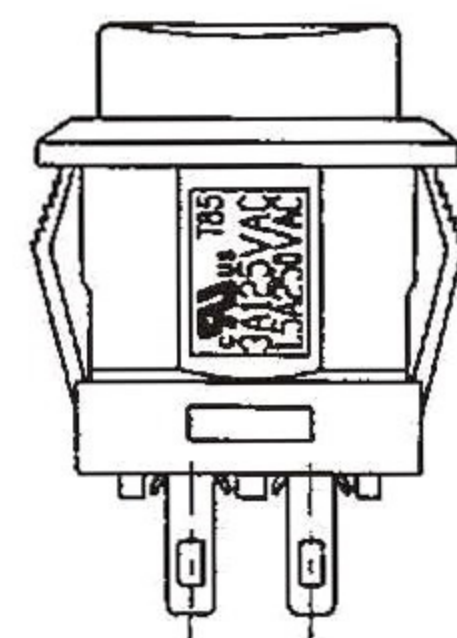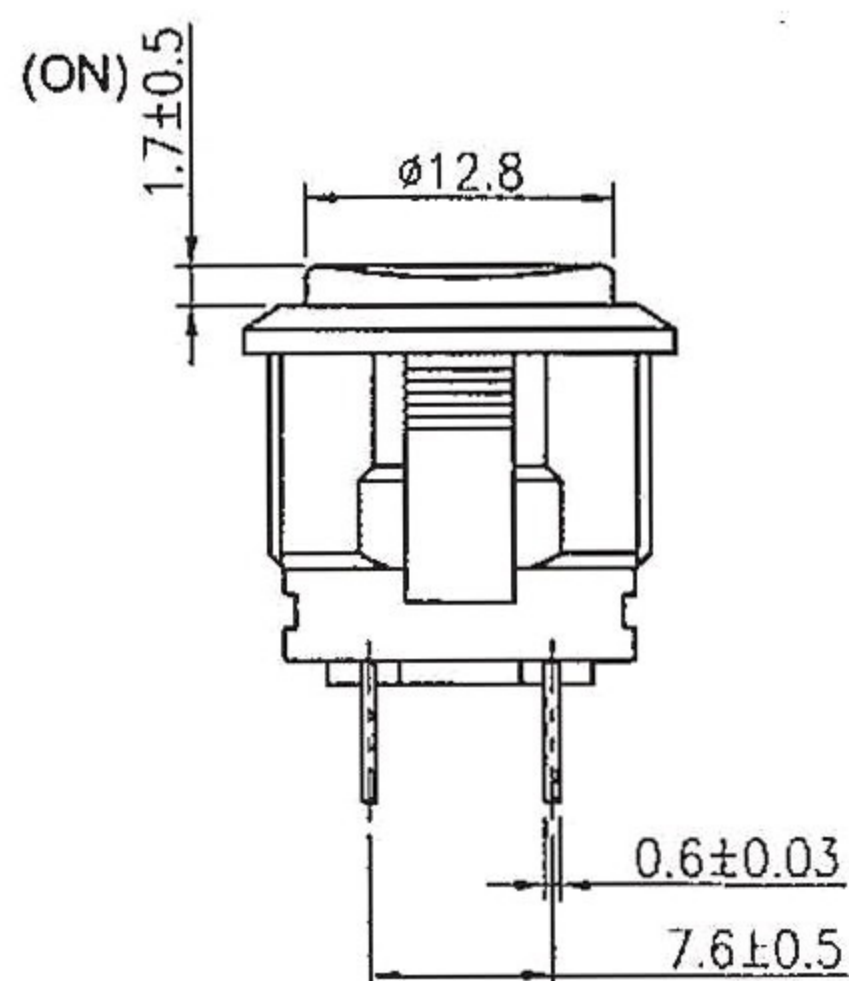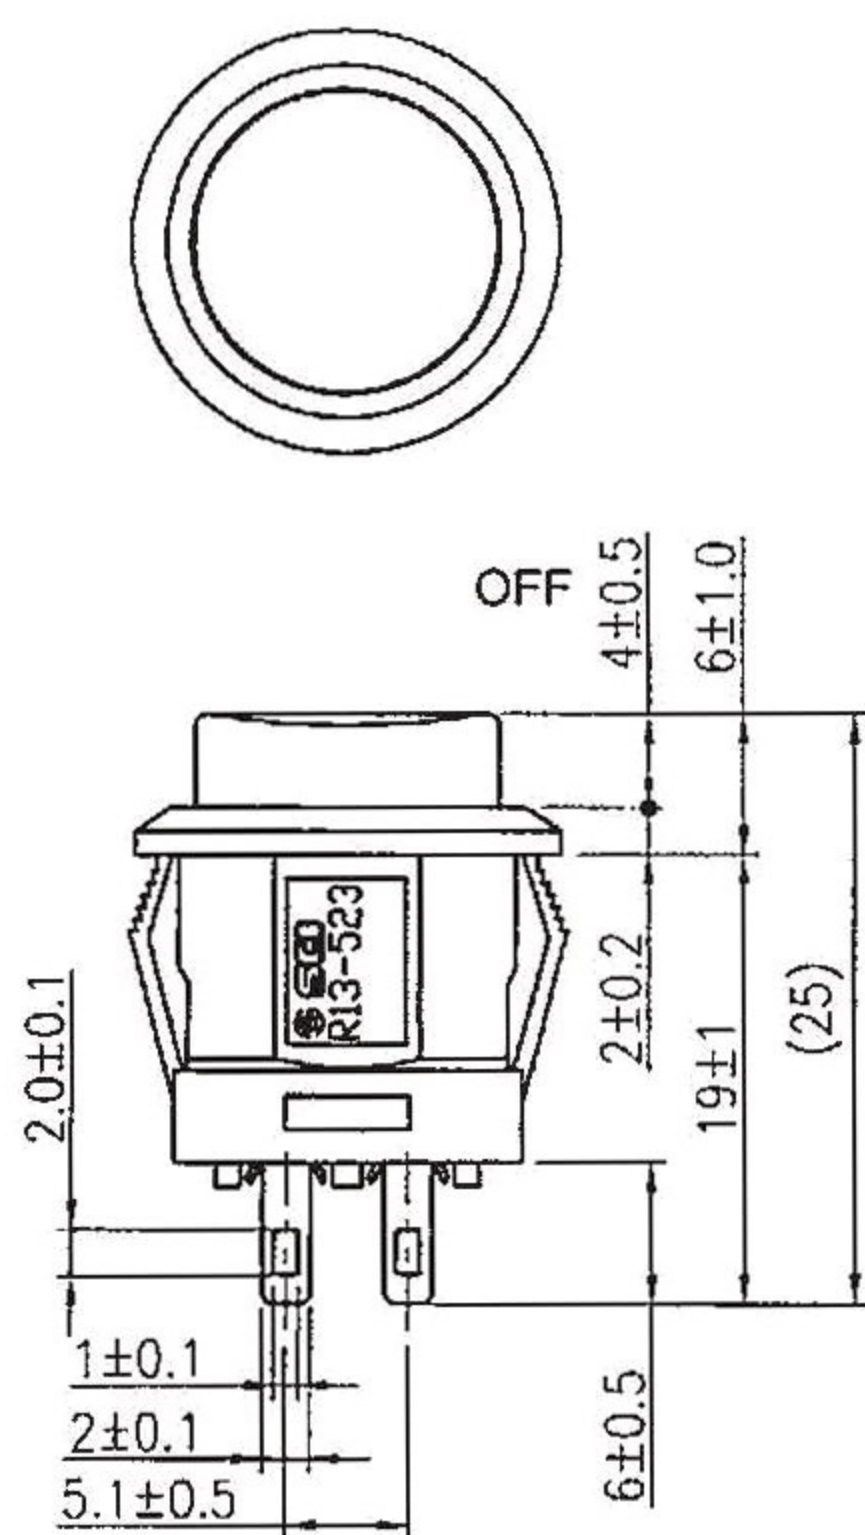

SPR13-523ALKYES	1830672	Yellow	Yellow
SPR13-523ALKMES	1830366	Green	Green
SPR13-523ALKDES	1830360	Red	Red
MODEL No.	BOM No.	Actuator Color	LED Color

Tolerances ±0.3 Unless Otherwise Specified

08/22/12	柳新強	增加SCI LOGO					△
Date	Name	Description					No.
Drawn	Checked	Approved	BOM No	See the table	Model Name	PUSH SWITCH	
柳新強	符子明	Simon	Customer No		Model No.	SPR13-523AL-05	Rev.
08/22/12	8/23-12	9/3-12	Unit	mm	喜威達企業股份有限公司		1