
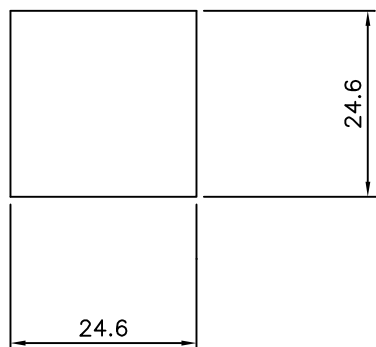


SWSS-6B

SCALE : 1:1

UNIT : mm

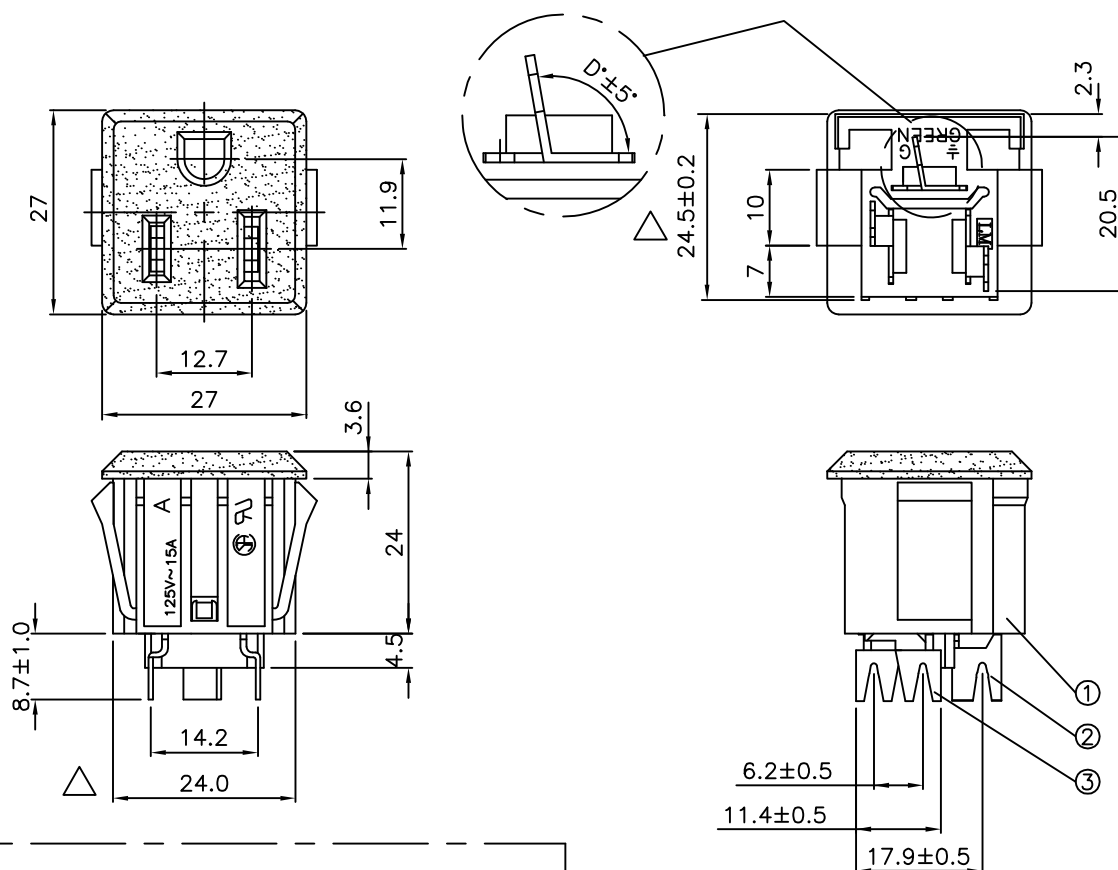

PANEL CUTOUT THICKNESS 2.0mm Max.
(This datum only for reference)
(這個數據僅供參考)

Standard:UL498 5-15R
Rating:15A 125V AC
Approvals:UL/CSA

Part No.	Color	D°
SWSS-6B	Black	100°
SWSS-6B-PC-1	(PANTONE 012C)Yellow	100°
SWSS-6B-PC-2	PMS COOL GRAY	100°
SWSS-6B-PC-3	white	100°
SWSS-6B-PC-4	灰色 (400C)	100°
SWSS-6B-PC-5	灰色 (423C)	100°
SWSS-6B-PC-6	灰色 (136C)	100°
SWSS-6B-PC-7	乳白色	100°
SWSS-6B-PC-8	合美TL灰	100°
SWSS-6B-PC-9	Black	120°

				DIMENSIONAL TOLERANCES	
				GRADATION	TOLERANCE
3	Soldering PIN B 0.6t Tin-Plated		2	X	±0.4
2	Soldering PIN A 0.6t Tin-Plated		1	X.X	±0.3
1	Body Insulator PC		1	X.XX	±0.1
APPROVED:		CHECK:	DRAWER:	ANGLE	
			HUI		
			98.10.29		
			MATERIAL NO: SWSS-6B		
			DRAWING NO: 810306		

ENGINEER NO: TWI-K-1065(K1)