



Rating	16A 125VAC 10A 250VAC	UL US
	10A 125VAC 6A 250VAC	CQC
	10(4)A 250V~	CCC
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C~85°C	
Switch Function	4P SPST ON-OFF (LED Independent)	




Thickness:2.0~3.0








Thickness:0.7~3.0

Circuit Diagram



LED Rating
Red:@20mA, If=2.0VDC

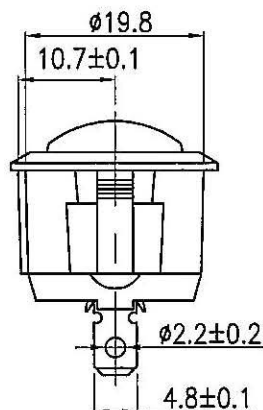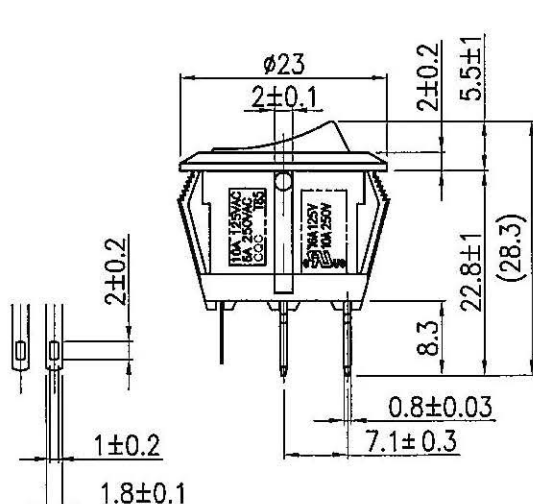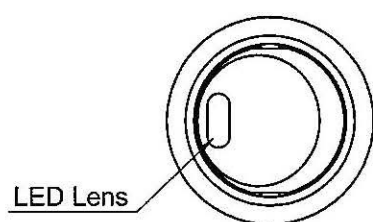

Tolerances Unless Otherwise Specified ±0.3

						△	
						△	
Date	Name	Description				No.	
Drawn	Checked	Approved	SCI BOM No.	1820868	Model Name	ROCKER SWITCH	
曹盈芳		王伯山	Customer No.		Model No.	SR13-112L-02	Rev.
06/25/'13		6/25/13	Unit	mm	SWEETA PRODUCTS CORPORATION		0