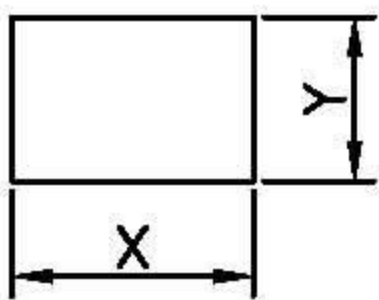
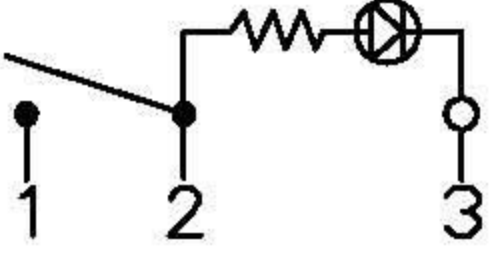
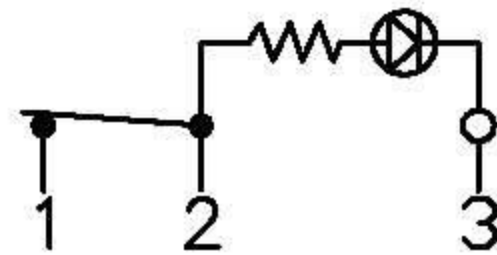


Rating	20A 12V DC	Mounting Hole 		Circuit Diagram OFF 	
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-25°C~85°C				
Circuit	3P SPST ON-OFF (LED)	Thickness	X	Y	ON
		0.75...1.25	19.2-0.1	13.2+0.1	
		1.25...2	19.4-0.1	13.2+0.1	
		2...3	19.8-0.1	13.2+0.1	

Material:

Frame: Black, Nylon 66 (94-V2)




Actuator: Black, Nylon 66 (94-V2)

Lens: Red Clear, PC

Terminals: Silver plated, Copper alloy

Light: LED

Hot stamping: None

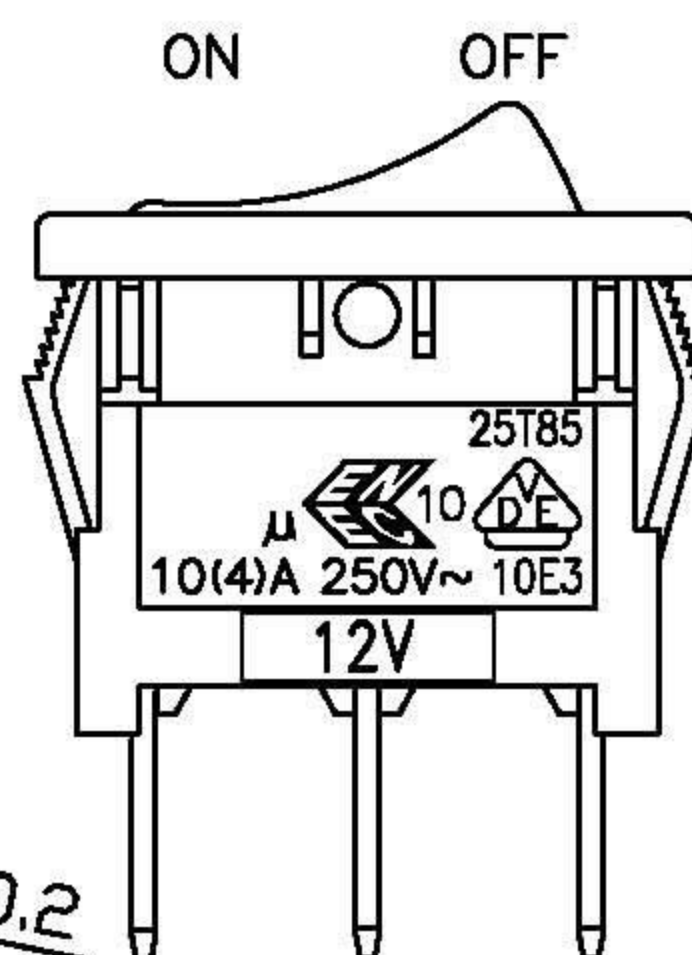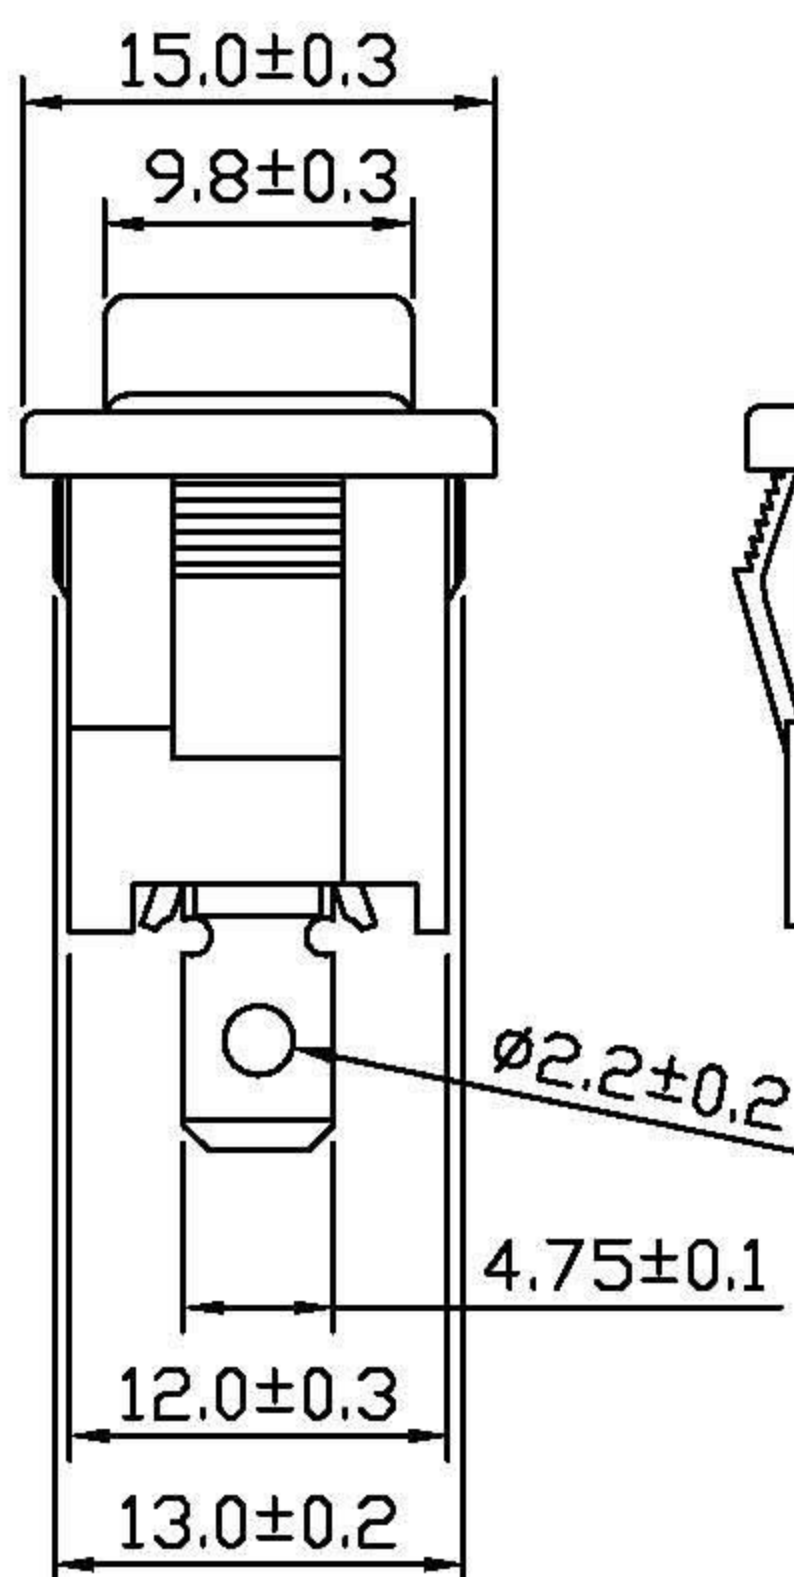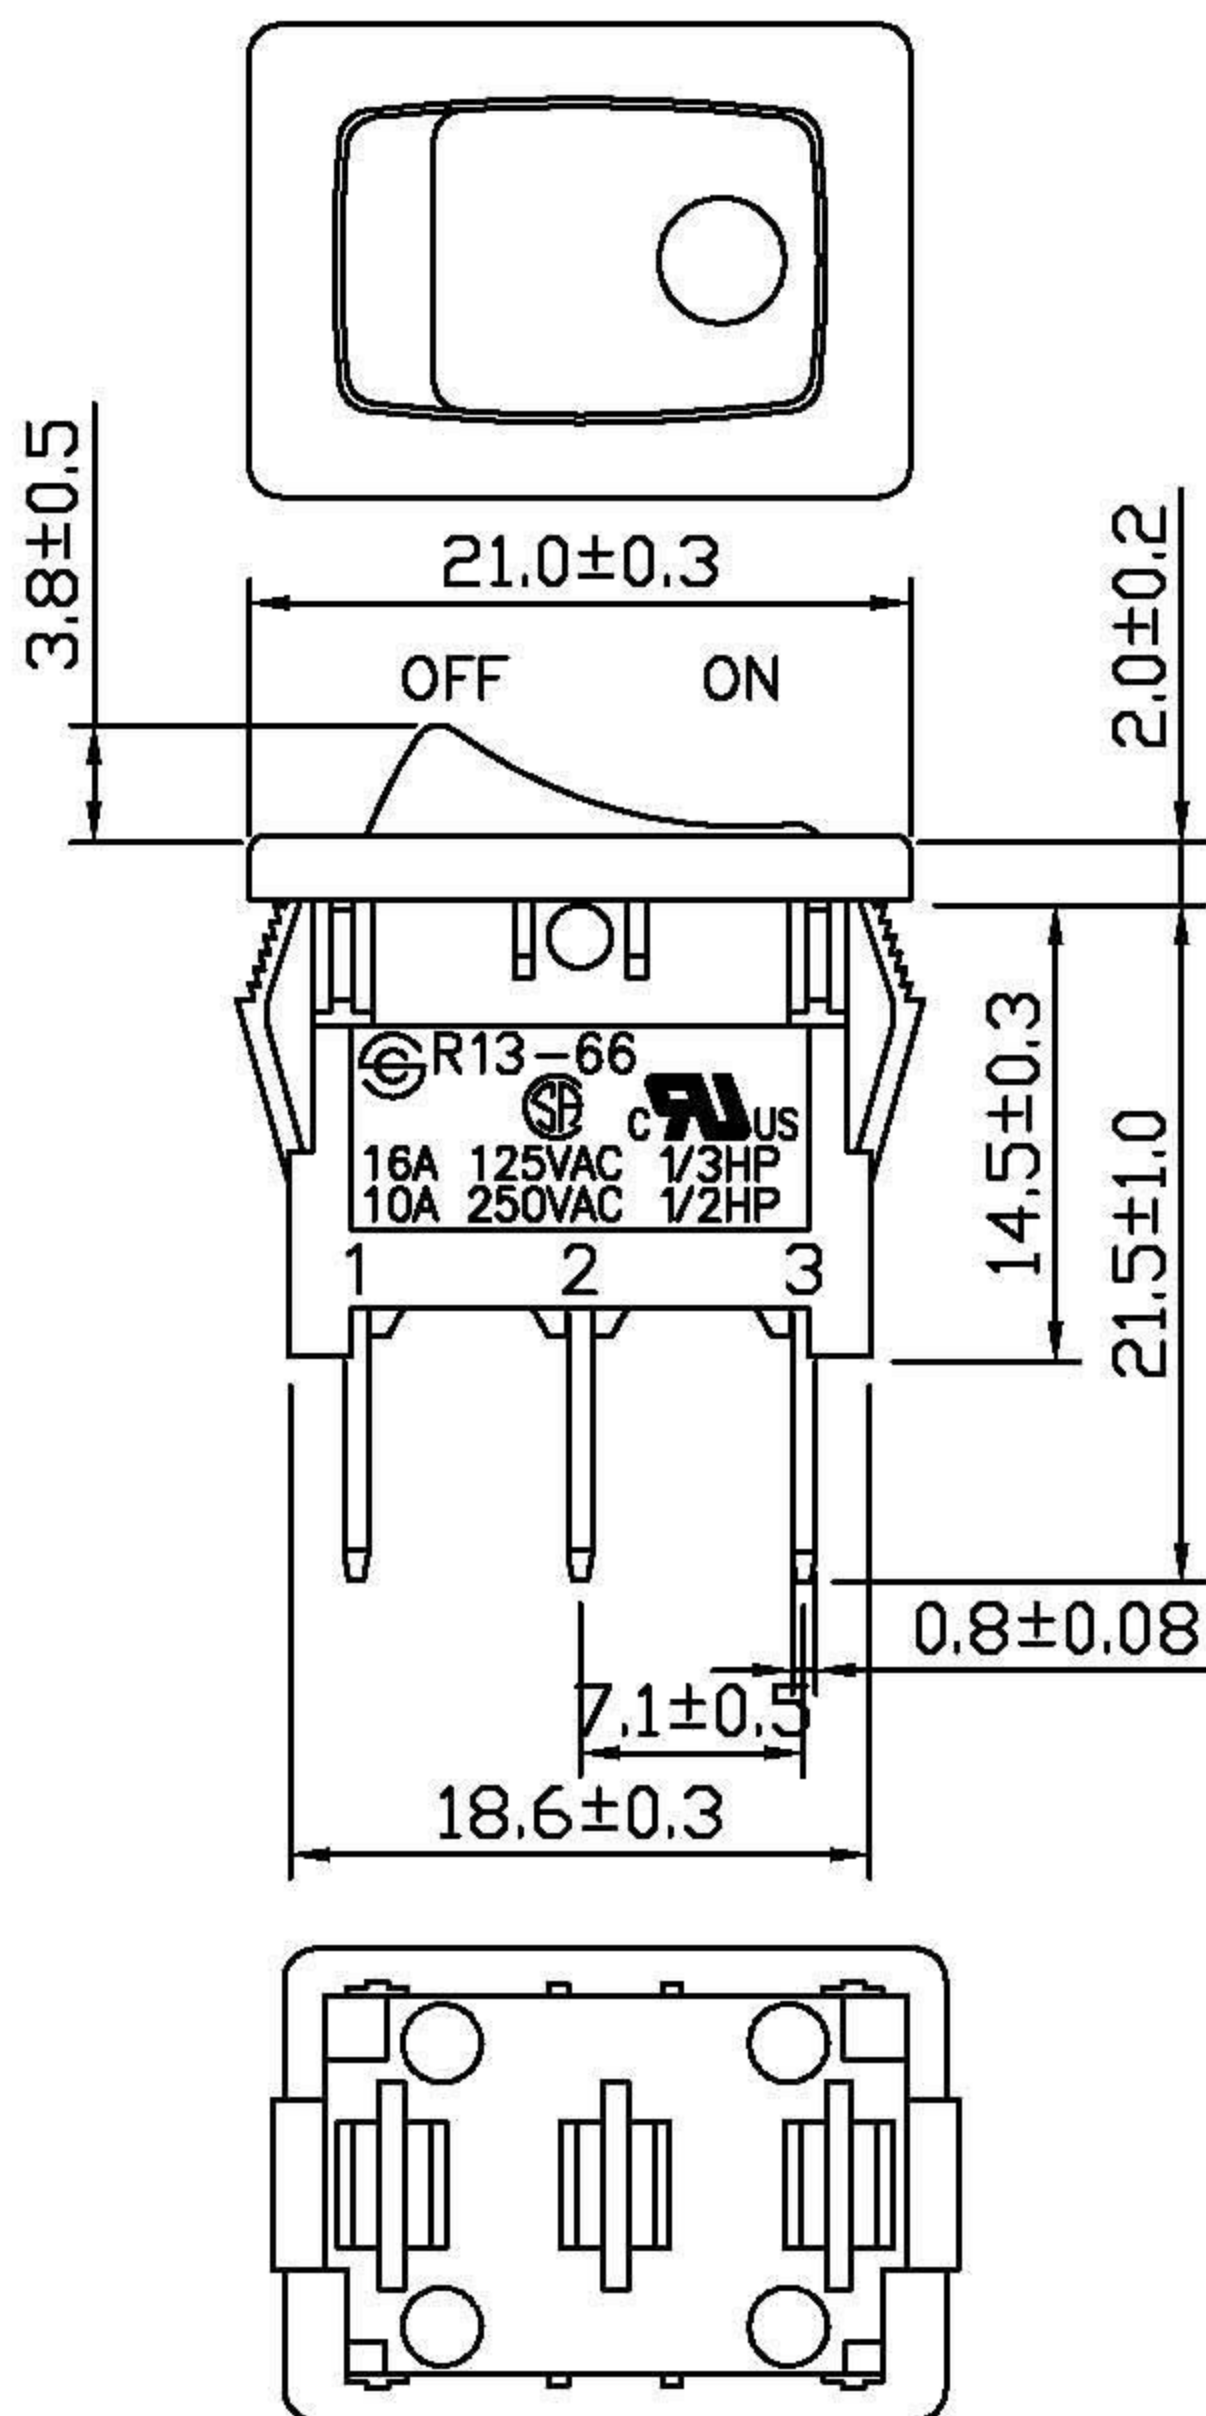

D:\黄平平\primary\SR13-66B2W-02(1824067).dwg

						△	
Date	Name	Description					NO
Drawn	Checked	Approved	SCI BOM No.	1824067	Model Name	ROCKER SWITCH	
黄平平			Customer No.		Model No.	SR13-66B2W-02	REV.
07/04/'08			Unit	mm	SWEETA PRODUCTS CORPORATION		0