

MINI TERMINAL BLOCKS

PITCH:5mm(0.196in)


RATING:10A 300VAC

APPROVALS: 

Specifications

Poles	2P & 3P
Wire Range	22 ~ 16 AWG
Housing	Polyamide 66, Green or Blue.
Solder Pin	Brass 0.6t, Tin Plated.
Wire Protector	0.2t Stainless steel.
Screw	M2.6, Steel. Zinc Plated.
Insul. Withstands Voltage	AC 2000V/min
Insul. Resistance	500MΩ or More at DC 500V
Using Temperature Range	-40°C ~ +105°C
Screw Torque Value	4kg-cm

STGGC-10-01

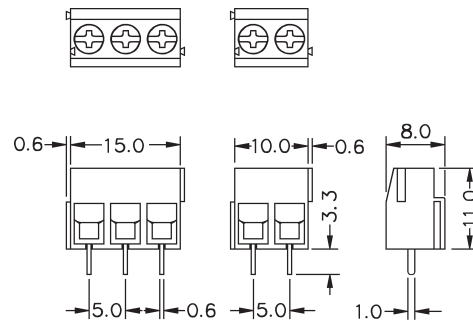

STGGC-10-02

