

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

STS-Series




SPECIFICATION

- 1.RATING:12 VDC 50mA
- 2.Operating force:200gf±50gf
- 3.Life:100,000 cycles Min
- 4.Total travel:0.25mm
- 5.Contact resistance:100m ohms Max(initial)
- 6.Insulation resistance:100M ohms Min(at 250VDC)
- 7.Dielectric withstanding voltage:250VAC for 1 minute
- 8.Operating temperature:−20°C~+70°C
- 9.Ambient humidity:75%RH Max


MATERIAL

- 1.Terminal:Brass plated Ag
- 2.Housing:Nylon,Y is the color code
- 3.Spring plate:SUS301 plated Au
- 4.Bottom:PBT
- 5.Cap:ABS,Z is the color code
- 6.LED:X is the color code

Part Number:STS-X-AY-BZ

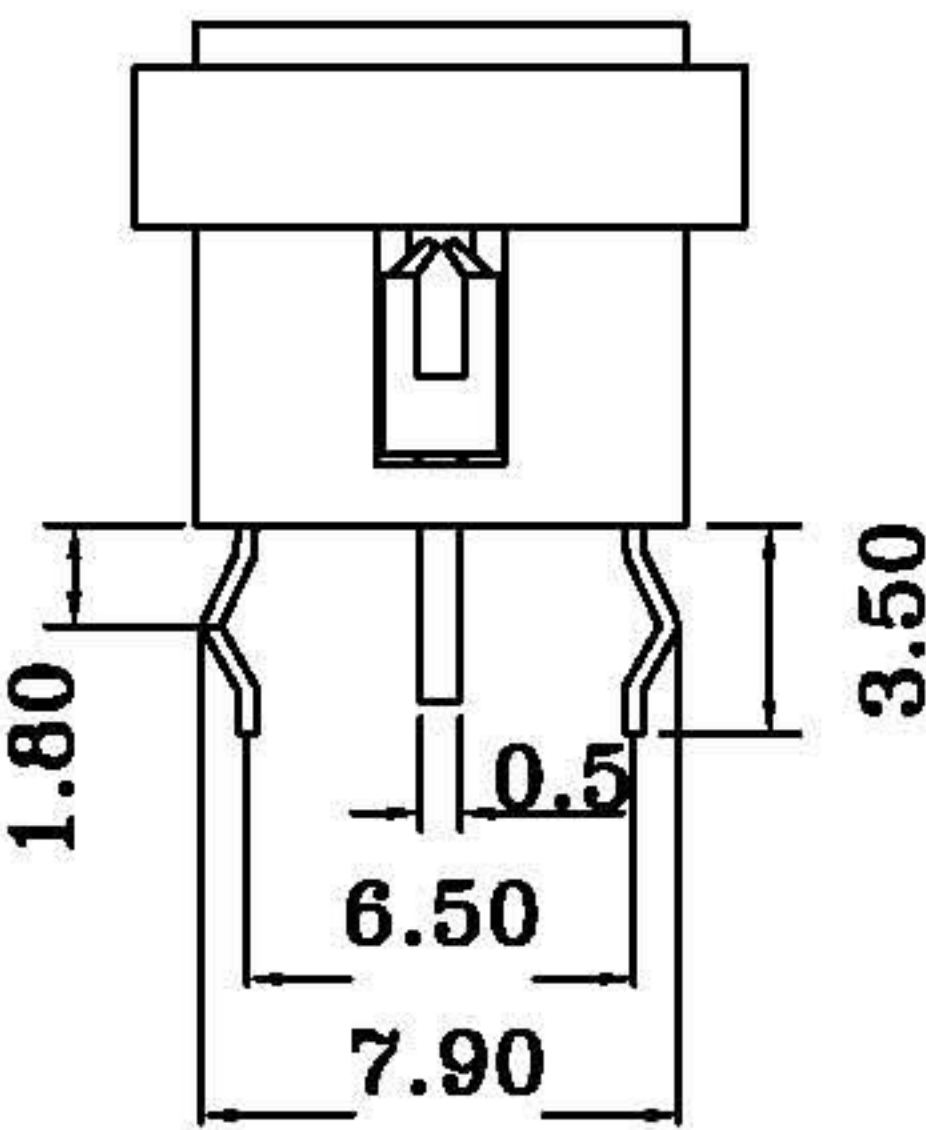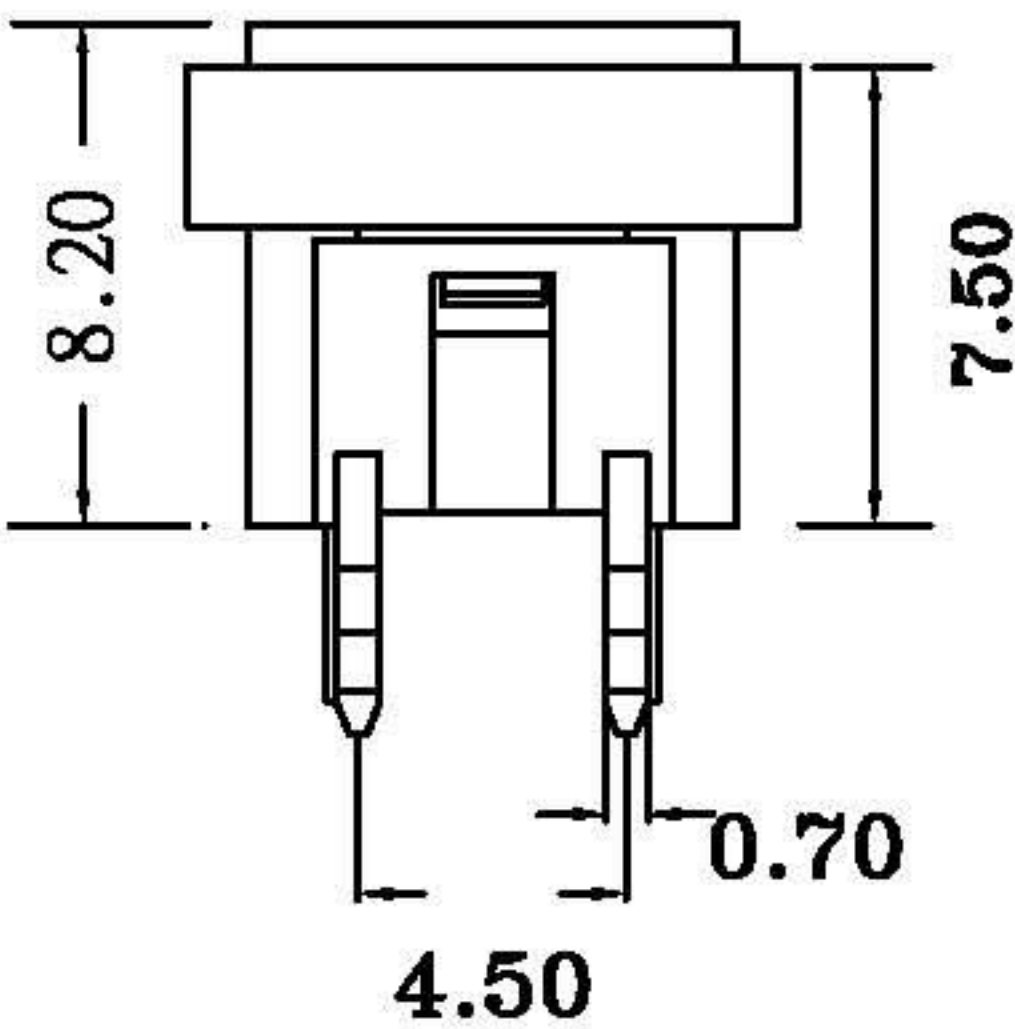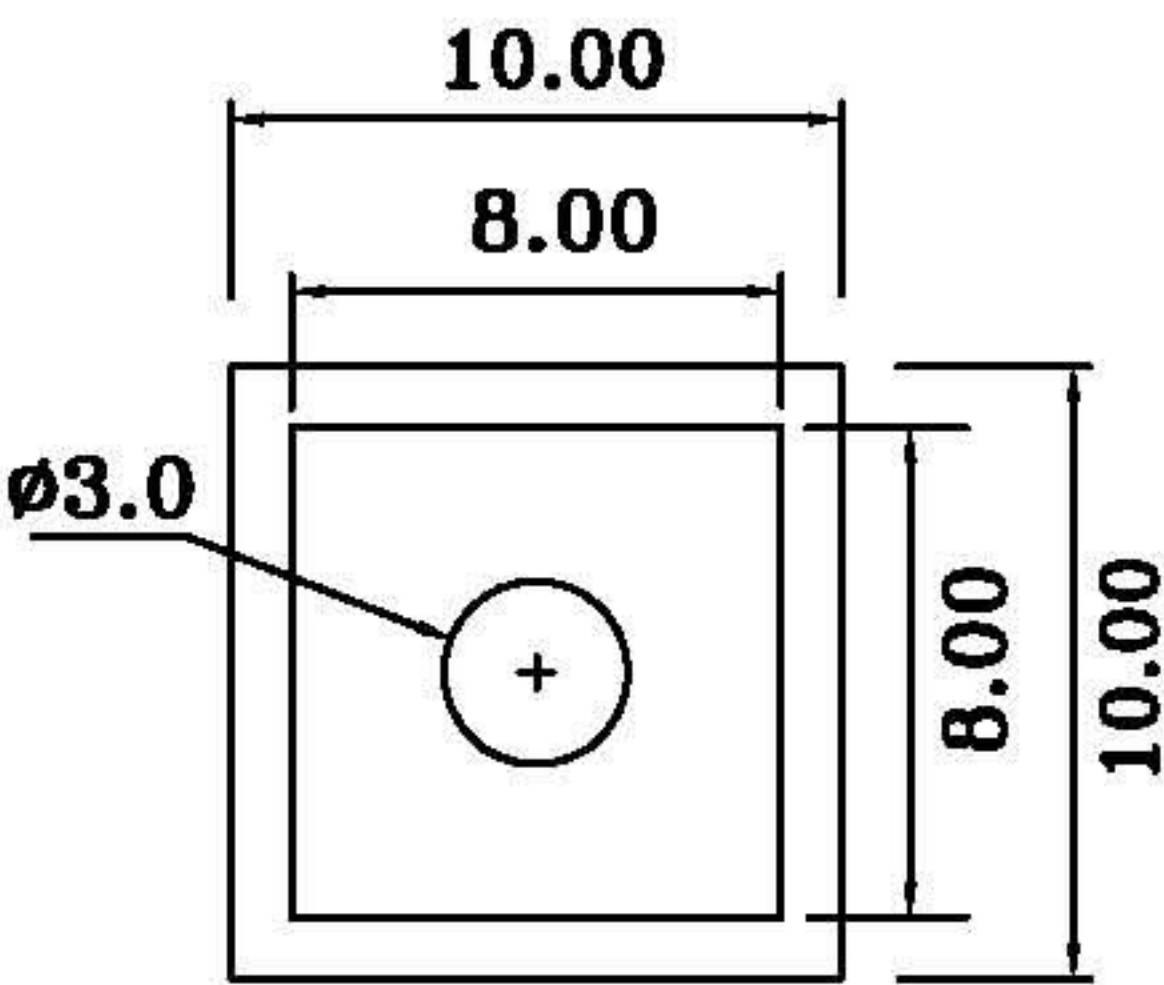

Circuit Diagram

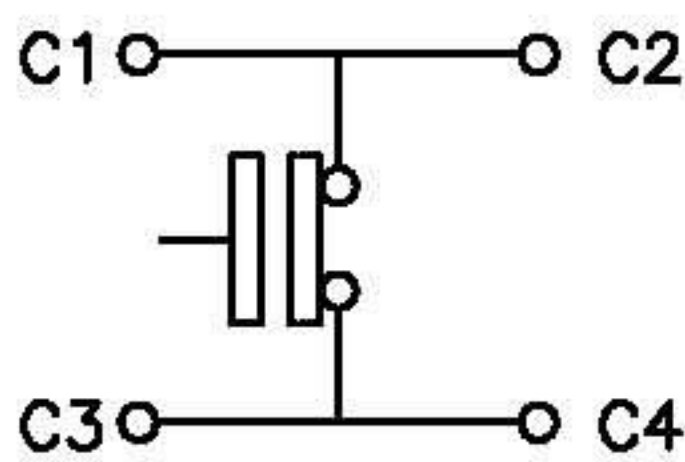

P.C.B. Mounting

