


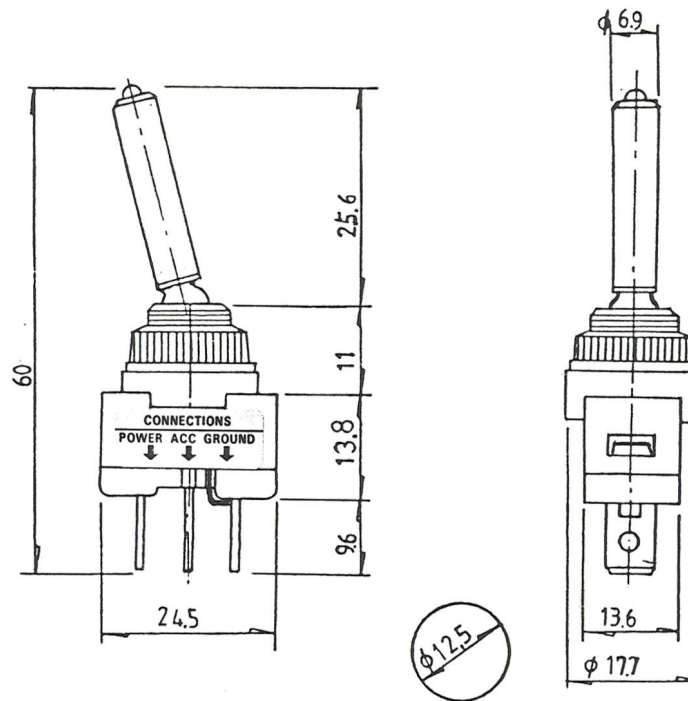

## Characteristics :

Contact resistance: 50m $\Omega$  max. (Initial)

Insulation resistance: 100M $\Omega$  min. (at 500V DC)

Dielectric strength: 1,000V AC 50/60Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating: 12V DC 15A

Circuit: OFF - ON

LED Colors: Red, Amber, Green, Blue

9403-11

喜威達企業股份有限公司  
SWEETA PRODUCTS CORPORATION

### TOLERANCES

X.  $\pm 1$   
X.X  $\pm 0.5$   
X.XX  $\pm 0.25$

### UNLESS NOTED

MIN WALL THKNS .06  
MAX DRAFT 2/SIDE  
ALL RADII .03

DATE 10/1/88 BY: W.D.GH PROJ: J. YEH EX.NO.

NAME: **Toggle Switch w/ LED**

SCALE 1:1 PROD NO. SSW-2775 L REV. J. YEH