


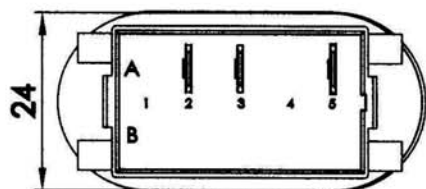
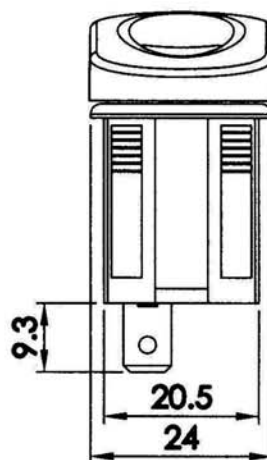
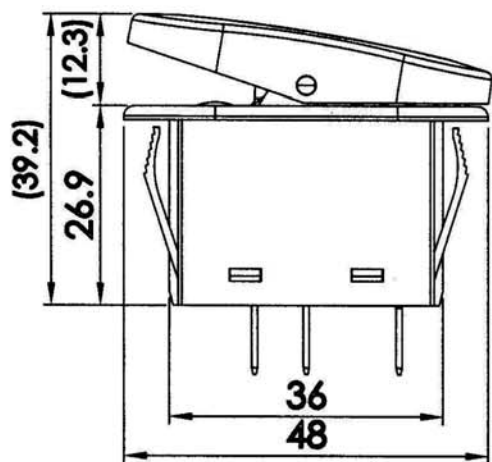


規格 Rating	20A 125VAC/10A 277VAC 21A 14VDC	裝配孔 Mount Hole			線路圖 Circuit Structure	
接觸電阻 Contact R.	50m ohm Max.					
絕緣電阻 Insulation R.	DC 500V 100M ohm Min.					
耐電壓 Dielectric Strength	AC 1500V 1minute					
動作特性 Circuit	3P SPST ON-OFF					
工作環境 Dielectric Strength	-20°~85°	Thickness	X	Y	3P SPST ON-OFF	
		0.75~1.25	21.2±0.1	36.6±0.1		
		1.25~2	21.2±0.1	36.8±0.1		
		2~3	21.2±0.1	37.0±0.1		

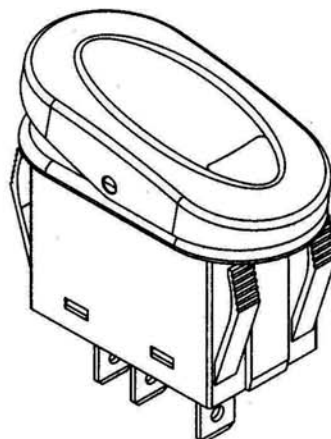

△	DATE	Name	Descriptions			
DRAWN	CHECKED	APPROVED	DELCITY P/N	Model Name		
許庭禎	94.8.29		Customer No.	Model NO.	SR13-271A2-BBNR-N1D	
08/29/05	蘇承民		Unit	mm	SWEETA PRODUCTS CORPORATION	