



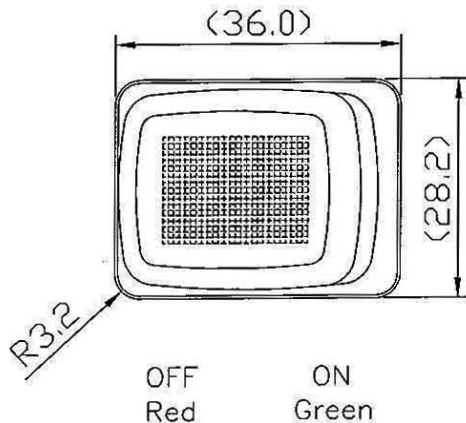
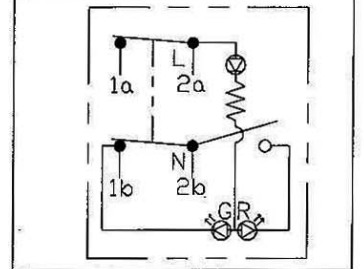

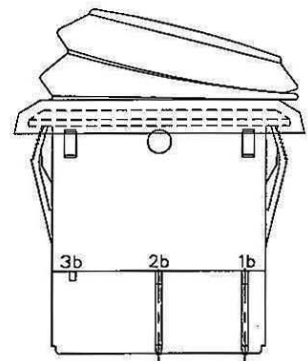


Rating	20A125V AC 1/3HP	Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.			Switch off, red LED lighten
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C.	Thickness	X	Y
Switch Function	4P DPST ON-OFF With LED	0.75~1.25	30.2-0.1	22.2+0.1
		1.25~2	30.4-0.1	22.2+0.1
		2~4	30.8-0.1	22.2+0.1

Switch on, green LED lighten

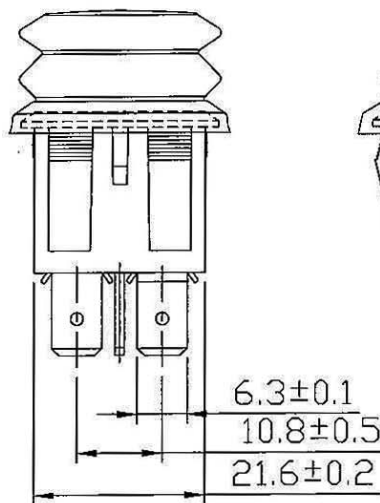

OFF Red ON Green

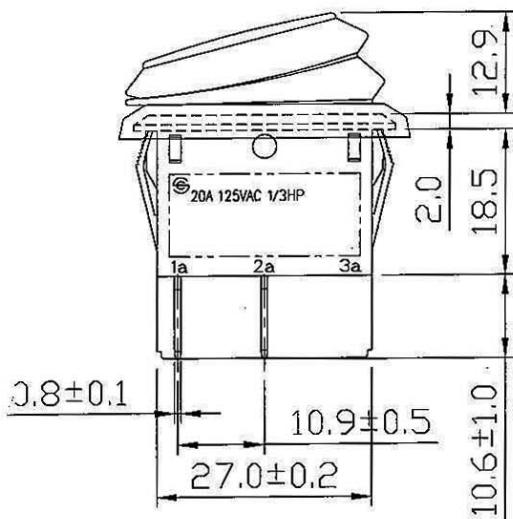

*MATERIAL:

Frame: Black, Nylon 66 (94-V2)

Actuator: Clear, PC (94-V2)

Terminals: Silver plated, Copper alloy

Waterproof Rubber: Silicone

*Waterproof: IP56

Tolerance: ±0.3mm unless otherwise specified

									△
									△
Date	Name	Description							NO
Drawn	Checked	Approved	SCI BOM No.			Model Name	ROCKER SWITCH		
蘇崇仁		<i>DZL</i>	Customer No.			Model No.	SR13-285A8L-01-GR4	REV.	
9/19/'08		10/25/08	Unit	mm	SWEETA PRODUCTS CORPORATION				0