



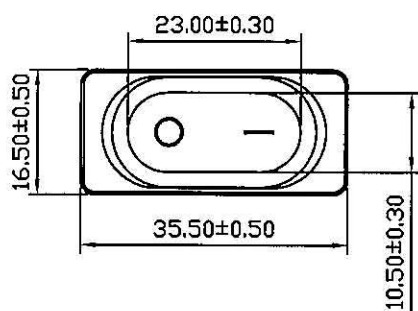




Rating	25A 14VDC, 15A 28VDC	Mounting Hole 	Circuit Diagram 
	16A 125VAC 1/8HP 10A 250VAC 1/3HP		
Contact Resistance	50m ohm Max.	Thickness 0.7~2.0	
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute	Thickness 0.75...1.25 1.25...2 2...3	X 30.2-0.1 30.4-0.1 30.8-0.1
Operation Temperature	-25°C~85°C		
Switch Function	2P SPST ON-OFF		
		Y 11.2+0.1 11.2+0.1 11.2+0.1	

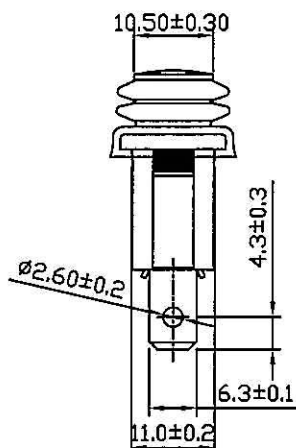

Frame: Black, Nylon 66 (94-V2)
 Actuator: Black, Nylon 66 (94-V2)
 Terminals 1,2: Coppe alloy, Silver plated
 Waterproof Rubber: Black, Silicone
 Printed: White, hot stamping
 *Waterproof: IP65

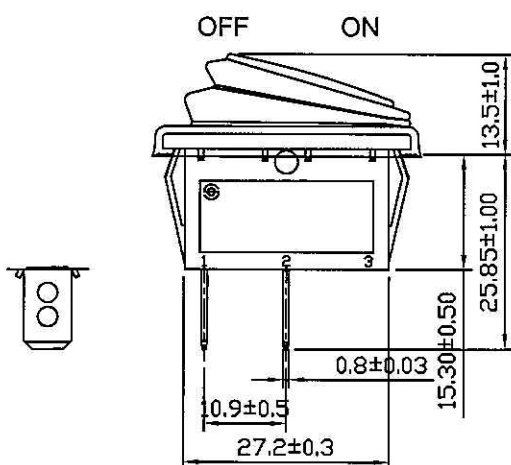

							△
							△
Date	Name	Description					NO
Drawn	Checked	Approved	SCI BOM No.	1824421	Model Name	ROCKER SWITCH	
曹盈芳		<i>Signature</i>	Customer No.		Model No.	SR13-70A8-01	REV.
04/14/14		<i>Signature</i>	Unit	mm	SWEETA PRODUCTS CORPORATION		0