
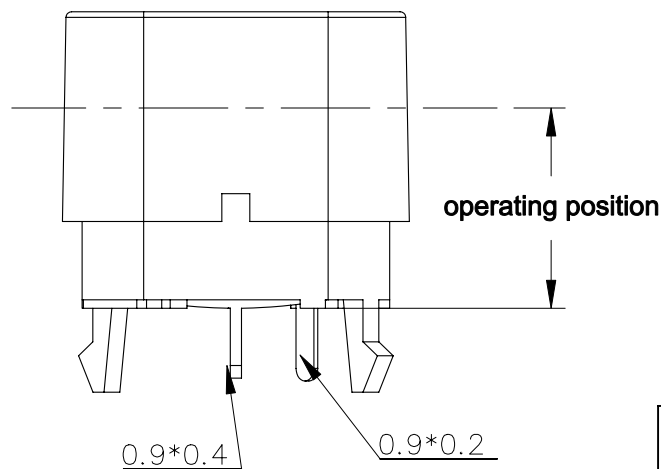
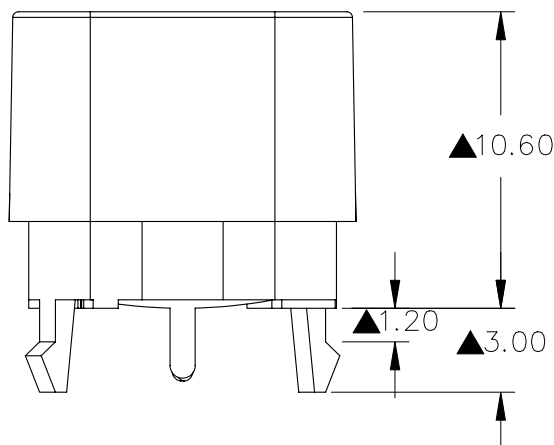
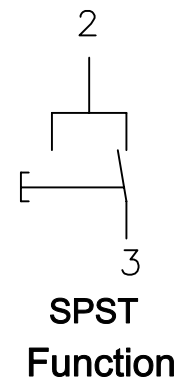
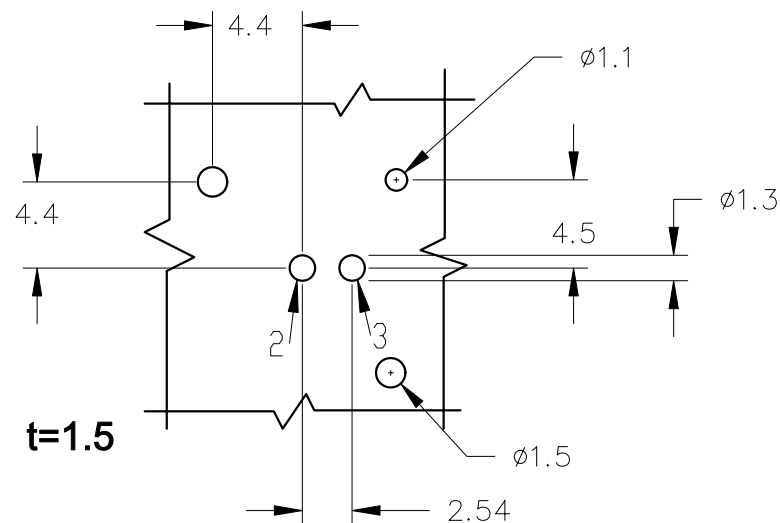


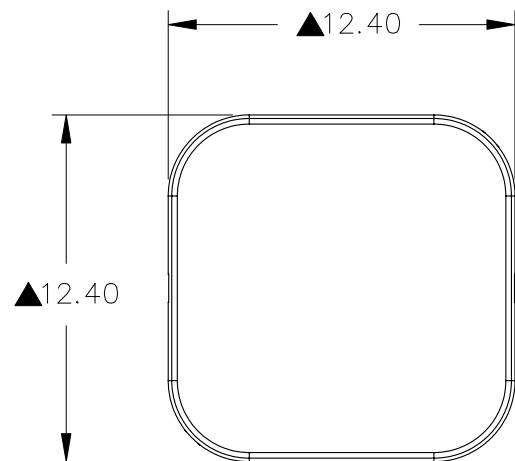

SPECIFICATIONS :

RATING : 30mA / 28VDC

OPERATING SPEED: 10mm/sec

ELECTRIC LIFE : 20,000 CYCLES

FORCE : 3.4N~6.4N

OPERATING POSITION : 8.9±0.2mm

FULL TRAVELS : 2.0mm

MATERIALS :

PUSHER : POM BLACK

DUST PROTETION CAP : POM BLACK

CASE : PA NATURE GLASS FIBER REINFORCED

SPRING : PIANO WIRE

Ⓐ CONTACT/TERMINALS : BRASS, SLIVER PLATED.

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2 TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 2° FILE NAME : SPS0001	TITLE 圖 名	SNAP ACTION SWITCH			SIZE 圖紙	A4
1	Ⓐ	CONTACT/TERMINALS規格變更		AUG-03-2010		DWG NO. 圖 號	SPS-3001			UNIT 單位	mm
2	Ⓑ					REV. 版 本	B	DATE 日 期	JUN - 29 - 2010	SHEET 張 數	1 of 1
3	Ⓒ					CHECKED BY 審 核	RICHARD		DRAWN BY 製 圖	王柏堅	
4	Ⓓ										
5	Ⓔ										