


規格承認書

客戶名稱		產品名稱	Reed Switch	產品型號	SMKA-16101
------	--	------	-------------	------	------------



Unit : mm
Scale :2:1

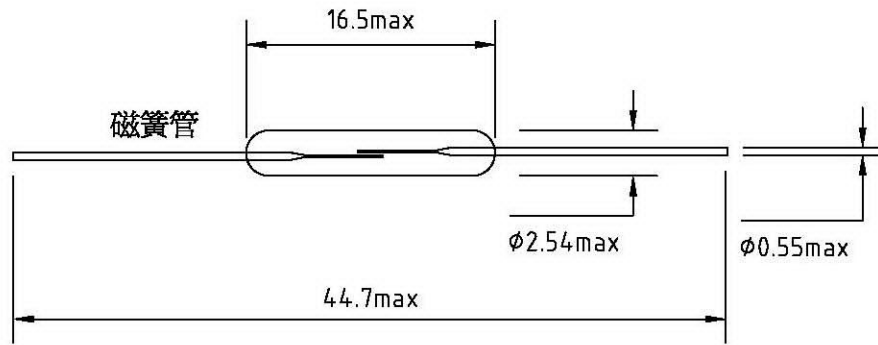

Unit : mm
Scale :1:1

MATERIAL SPECIFICATION:

1. Reed Switch : MKA16101 AT1015	6.Max Switching Current : 0.5 A	11.Max Contact Capacitance : 0.3pF
2. Contact Form : A	7.Temperature : -55~+125°C	12.Typ. Resonant Frequency: 3.0 kHz
3. Contact Material : Ru/Rh	8.Min Breakdown Voltage : 220Vdc	13.Electrical Life: 2X10 ⁶ (5VDC,10mA)
4. Max Contact Rating : 10W	9.Max Contact Resistance : 100 m Ohm	14.Test coil : 5000 turns,620 Ohm
5.Max Switching Voltage : 100 Vdc	10.Min Insulation Resistance : 10 ⁹ Ohm	

Designed by	Checked by	Drawing by GUAN	Modify by	Date 2003/01/07	Scale 1:1
-------------	------------	--------------------	-----------	--------------------	--------------

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Filename SMKA-16101.DWG

Drawing No. SMKA-16101

Edition
00

Sheet
1